

YGE 72 CELL SERIES 2




19.6%
CELL EFFICIENCY

10 YEAR
PRODUCT WARRANTY

0-5W
POWER TOLERANCE

25 Years Linear Warranty

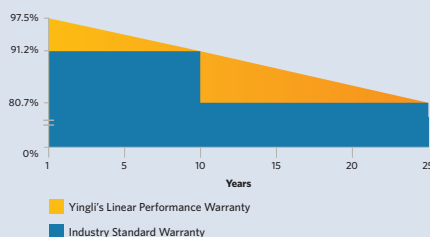

YINGLISOLAR.COM



IMPROVED POWER NEVER SETTLE FOR LESS

Independently tested for proven product quality and long-term reliability. Millions of PV systems installed worldwide demonstrate Yingli's industry leadership.



Higher Durability

The multi-busbar design can decrease the risk of the cell micro-cracks and fingers broken.



High Power Density

High conversion efficiency and more power output per square meter, by lower series resistance and improved light harvesting.



PID Resistant

Tested in accordance to the standard IEC 62804, our PV modules have demonstrated resistance against PID (Potential Induced Degradation), which translates to security for your investment.



Advanced Glass

Our high-transmission glass features a unique anti-reflective coating that directs more light on the solar cells, resulting in a higher energy yield.

Yingli Green Energy

Yingli Green Energy Holding Company Limited (NYSE: YGE), known as "Yingli Solar," is one of the world's leading solar panel manufacturers with the mission to provide affordable green energy for all. Yingli Solar makes solar power possible for communities everywhere by using our global manufacturing and logistics expertise to address unique local challenges.

YGE 72 CELL SERIES 2

ELECTRICAL PERFORMANCE

Electrical parameters at Standard Test Conditions (STC)

Module type			YLXXXP-35b (XXX=Pmax)					
			YLXXXP-35b 1500V (XXX=Pmax)					
Power output	P_{max}	W	345	340	335	330	325	320
Power output tolerances	P_{max}	W	0/+5					
Module efficiency	η_m	%	17.7	17.5	17.2	17.0	16.7	16.5
Voltage at P_{max}	V_{mpp}	V	38.5	38.1	37.7	37.3	36.9	36.5
Current at P_{max}	I_{mpp}	A	8.97	8.93	8.89	8.85	8.82	8.78
Open-circuit voltage	V_{oc}	V	46.1	45.9	45.7	45.6	45.4	45.2
Short-circuit current	I_{sc}	A	9.45	9.41	9.37	9.33	9.29	9.25

STC: 1000W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3.
Average relative efficiency reduction of 3.3% at 200W/m² according to EN 60904-1.

Electrical parameters at Nominal Operating Cell Temperature (NOCT)

Power output	P_{max}	W	254.5	250.8	247.1	243.4	239.7	236.0
Voltage at P_{max}	V_{mpp}	V	35.5	35.1	34.7	34.4	34.0	33.6
Current at P_{max}	I_{mpp}	A	7.18	7.14	7.11	7.08	7.06	7.02
Open-circuit voltage	V_{oc}	V	42.9	42.7	42.5	42.4	42.2	42.1
Short-circuit current	I_{sc}	A	7.64	7.60	7.57	7.54	7.51	7.47

NOCT: open-circuit module operation temperature at 800W/m² irradiance, 20°C ambient temperature, 1m/s wind speed.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45 +/- 2
Temperature coefficient of P_{max}	γ	%/°C	-0.39
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.30
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.05

OPERATING CONDITIONS

Max. system voltage	1000V _{DC} /1500V _{DC}
Max. series fuse rating *	15A
Operating temperature range	-40°C to 85°C
Max. static load, front (e.g., snow)	5400Pa
Max. static load, back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

*DO NOT CONNECT FUSE IN COMBINER BOX WITH TWO OR MORE STRINGS IN PARALLEL CONNECTION

CONSTRUCTION MATERIALS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Cell (quantity / material / number of busbars)	72 / multicrystalline silicon / 12 or 5
Frame (material)	anodized aluminum alloy
Junction box (protection degree)	≥ IP67
Cable (length / cross-sectional area)	1100mm / 4mm ²

• Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice. The specifications may deviate slightly and are not guaranteed.

• The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE, ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007, SA 8000:2015





GENERAL CHARACTERISTICS

Dimensions (L / W / H)	1960mm / 992mm / 40mm
Weight	22kg


PACKAGING SPECIFICATIONS

Number of modules per pallet	26
Number of pallets per 40' container	24
Packaging box dimensions (L / W / H)	1995mm / 1145mm / 1170mm
Box weight	616kg

Unit: mm

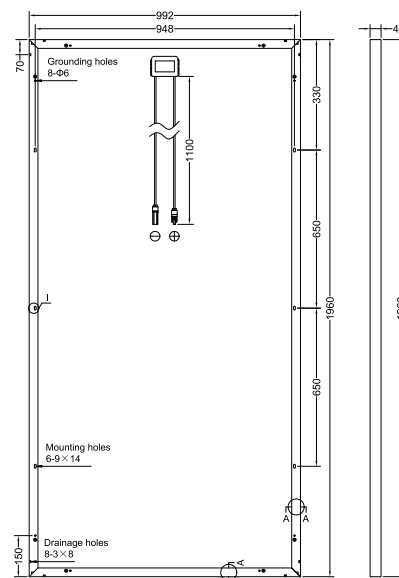

DETAIL I



SECTION A-A



Warning: Read the Installation and User Manual in its entirety before handling, installing, and operating Yingli Solar modules.

Optima Solar Systems Limited

N° 33 Sir Arku Korsah Road,
Airport Residential Area, Accra
(Near National Service Secretariat HQ)

Orders & Customer service Line:

+233 (0) 264 55 00 05

E: trade@optimasolarsystems.com

W: www.optimasolarsystems.com

(Working with Yingli Namene)

